


## Straight Bushings - Self-Lubricating

- Bushings are stocked to dimensions & tolerances shown
- Solid bronze with graphite plugs
- Perfect for mold alignment
- Greaseless application
- For use with leader pins



PCS Self-Lubricating Straight Bushings are solid bronze with graphite plugs. Nominal diameters ranging from 3/4" to 3" are available. PCS Self-Lubricating Straight Bushings reduce friction on leader pins and are press-fit into place. These bushings do not require grease which makes them great for food-grade, medical and high-speed applications.

SPECIFICATIONS	
D I.D. Tolerance	+ .0005 / - .0000
A O.D. Tolerance	+ .0005 / - .0000
L Overall Length Tolerance	+ .000 / - .060

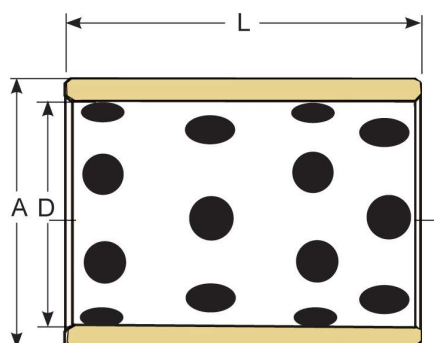

**Standard:** Inch

**Material:** AMPCO 18 Bronze with graphite plugs

**Hardness:** 92 Brinell Typical

CATALOG NO.	NOMINAL I.D.	D	A	L
MS750-7	3/4	.7505	1.1255	7/8
MS750-11				1-3/8
MS750-12				1-1/2
MS875-10	7/8	.8755	1.2505	1-1/4
MS875-12				1-1/2
MS100-10	1	1.0005	1.3755	1-1/4
MS100-11				1-3/8
MS100-12				1-1/2
MS100-14				1-3/4
MS100-16				2
MS100-24				3
MS125-10				1-1/4
MS125-11	1-3/8			
MS125-12	1-1/2			
MS125-14	1-3/4			
MS125-15	1-7/8			
MS125-16	2			
MS125-24	3			

CATALOG NO.	NOMINAL I.D.	D	A	L
MS150-10	1-1/2	1.5005	2.0005	1-1/4
MS150-11				1-3/8
MS150-12				1-1/2
MS150-14				1-3/4
MS150-15				1-7/8
MS150-16				2
MS150-24	3			
MS175-10	1-3/4	1.7505	2.2505	1-1/4
MS175-12				1-1/2
MS175-14				1-3/4
MS175-16				2
MS175-20				2-1/2
MS175-24				3
MS175-28				3-1/2
MS175-32				4

Continued on next page


## Straight Bushings - Self-Lubricating

- Bushings are stocked to dimensions & tolerances shown
- Solid bronze with graphite plugs
- Perfect for mold alignment
- Greaseless application
- For use with leader pins

PCS Self-Lubricating Straight Bushings are solid bronze with graphite plugs. Nominal diameters ranging from 3/4" to 3" are available. PCS Self-Lubricating Straight Bushings reduce friction on leader pins and are press-fit into place. These bushings do not require grease which makes them great for food-grade, medical and high-speed applications.



SPECIFICATIONS	
D I.D. Tolerance	+0.0005 / -0.0000
A O.D. Tolerance	+0.0005 / -0.0000
L Overall Length Tolerance	+0.000 / -0.060

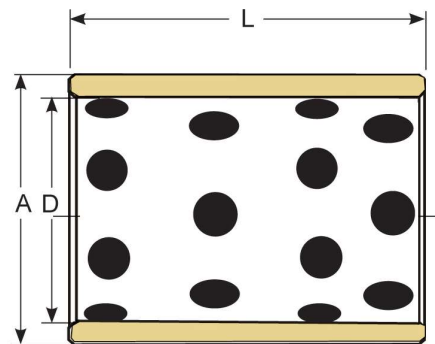

**Standard:** Inch

**Material:** AMPCO 18 Bronze with graphite plugs

**Hardness:** 92 Brinell Typical

CATALOG NO.	NOMINAL I.D.	D	A	L
MS200-10	2	2.0005	2.5005	1-1/4
MS200-12				1-1/2
MS200-16				2
MS200-20				2-1/2
MS200-24				3
MS200-31				3-7/8
MS225-12	2-1/4	2.2505	2.7505	1-1/2
MS225-16				2
MS225-20				2-1/2
MS225-24				3
MS250-12	2-1/2	2.5005	3.2505	1-1/2
MS250-16				2
MS250-24				3
MS250-39				4-7/8

CATALOG NO.	NOMINAL I.D.	D	A	L
MS300-16	3	3.0005	3.7505	2
MS300-20				2-1/2
MS300-24				3
MS300-28				3-1/2
MS300-39				4-7/8