


Metric M-2 Straight Ejector Pins - Standard

PCS Company's Metric M-2 (High Speed Steel or HSS) Straight Ejector Pins - Standard in lengths ranging from 60mm to 350mm. The diameters start at 0.2mm and go up to 12mm. Pin diameter tolerance is -0.01 / -0.02mm.


Features:

- Unit of measure: Millimeters
- Material: SKH51 (M2 High Speed Steel)
- Hardness: 58-60 HRC
- Pin Diameters: 0.2 to 12mm
- Lengths: Lengths: 60 to 350mm

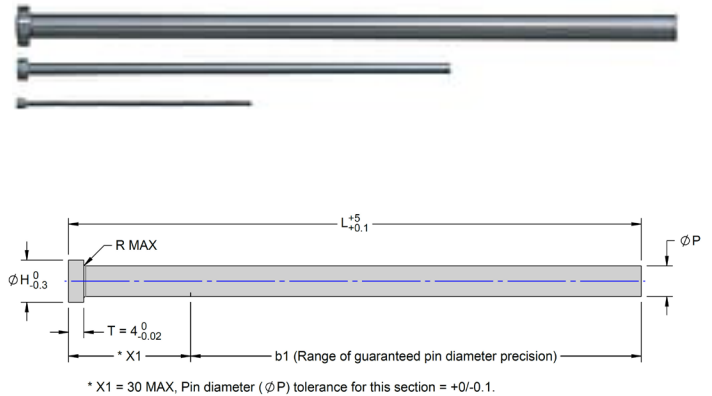


Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B0.2-60	0.2	-0.01/-0.02mm	60	2	4	0.3	No
EPHE-B0.3-60	0.3	-0.01/-0.02mm	60	3	4	0.3	Yes
EPHE-B0.4-60	0.4	-0.01/-0.02mm	60	3	4	0.3	Yes
EPHE-B0.4-100	0.4	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.5-60	0.5	-0.01/-0.02mm	60	3	4	0.3	Yes
EPHE-B0.5-100	0.5	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.6-100	0.6	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.6-150	0.6	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B0.7-100	0.7	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.7-150	0.7	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B0.8-100	0.8	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.8-150	0.8	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B0.9-100	0.9	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B0.9-150	0.9	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1-100	1.0	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1-150	1.0	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1-200	1.0	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.1-100	1.1	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1.1-150	1.1	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1.1-200	1.1	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.2-100	1.2	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1.2-150	1.2	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1.2-200	1.2	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.3-100	1.3	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1.3-150	1.3	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1.3-200	1.3	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.4-100	1.4	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1.4-150	1.4	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1.4-200	1.4	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.5-100	1.5	-0.01/-0.02mm	100	3	4	0.3	Yes
EPHE-B1.5-150	1.5	-0.01/-0.02mm	150	3	4	0.3	Yes
EPHE-B1.5-200	1.5	-0.01/-0.02mm	200	3	4	0.3	Yes
EPHE-B1.5-250	1.5	-0.01/-0.02mm	250	3	4	0.3	Yes
EPHE-B1.6-100	1.6	-0.01/-0.02mm	100	4	4	0.3	Yes
EPHE-B1.6-150	1.6	-0.01/-0.02mm	150	4	4	0.3	Yes
EPHE-B1.6-200	1.6	-0.01/-0.02mm	200	4	4	0.3	Yes
EPHE-B1.6-250	1.6	-0.01/-0.02mm	250	4	4	0.3	Yes

Metric M-2 Straight Ejector Pins - Standard

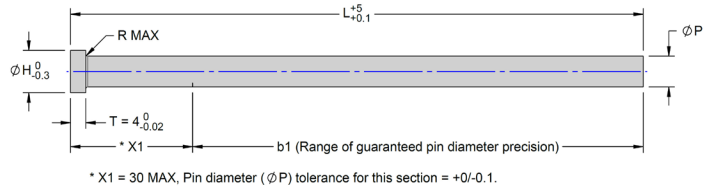


Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B1.7-100	1.7	-0.01/-0.02mm	100	4	4	0.3	Yes
EPHE-B1.7-150	1.7	-0.01/-0.02mm	150	4	4	0.3	Yes
EPHE-B1.7-200	1.7	-0.01/-0.02mm	200	4	4	0.3	Yes
EPHE-B1.8-100	1.8	-0.01/-0.02mm	100	4	4	0.3	Yes
EPHE-B1.8-150	1.8	-0.01/-0.02mm	150	4	4	0.3	Yes
EPHE-B1.8-200	1.8	-0.01/-0.02mm	200	4	4	0.3	Yes
EPHE-B1.9-100	1.9	-0.01/-0.02mm	100	4	4	0.3	Yes
EPHE-B1.9-150	1.9	-0.01/-0.02mm	150	4	4	0.3	Yes
EPHE-B1.9-200	1.9	-0.01/-0.02mm	200	4	4	0.3	Yes
EPHE-B2-100	2.0	-0.01/-0.02mm	100	4	4	0.3	Yes
EPHE-B2-150	2.0	-0.01/-0.02mm	150	4	4	0.3	Yes
EPHE-B2-200	2.0	-0.01/-0.02mm	200	4	4	0.3	Yes
EPHE-B2-250	2.0	-0.01/-0.02mm	250	4	4	0.3	Yes
EPHE-B2-300	2.0	-0.01/-0.02mm	300	4	4	0.3	Yes
EPHE-B2.1-100	2.1	-0.01/-0.02mm	100	5	4	0.5	Yes
EPHE-B2.1-150	2.1	-0.01/-0.02mm	150	5	4	0.5	Yes
EPHE-B2.1-200	2.1	-0.01/-0.02mm	200	5	4	0.5	Yes
EPHE-B2.1-250	2.1	-0.01/-0.02mm	250	5	4	0.5	Yes
EPHE-B2.2-100	2.2	-0.01/-0.02mm	100	5	4	0.5	Yes
EPHE-B2.2-150	2.2	-0.01/-0.02mm	150	5	4	0.5	Yes
EPHE-B2.2-200	2.2	-0.01/-0.02mm	200	5	4	0.5	Yes
EPHE-B2.3-100	2.3	-0.01/-0.02mm	100	5	4	0.5	Yes
EPHE-B2.3-150	2.3	-0.01/-0.02mm	150	5	4	0.5	Yes
EPHE-B2.3-200	2.3	-0.01/-0.02mm	200	5	4	0.5	Yes
EPHE-B2.4-100	2.4	-0.01/-0.02mm	100	5	4	0.5	Yes
EPHE-B2.4-150	2.4	-0.01/-0.02mm	150	5	4	0.5	Yes
EPHE-B2.4-200	2.4	-0.01/-0.02mm	200	5	4	0.5	Yes
EPHE-B2.5-100	2.5	-0.01/-0.02mm	100	5	4	0.5	Yes
EPHE-B2.5-150	2.5	-0.01/-0.02mm	150	5	4	0.5	Yes
EPHE-B2.5-200	2.5	-0.01/-0.02mm	200	5	4	0.5	Yes
EPHE-B2.5-250	2.5	-0.01/-0.02mm	250	5	4	0.5	Yes
EPHE-B2.5-300	2.5	-0.01/-0.02mm	300	5	4	0.5	Yes
EPHE-B2.6-100	2.6	-0.01/-0.02mm	100	6	4	0.5	Yes
EPHE-B2.6-150	2.6	-0.01/-0.02mm	150	6	4	0.5	Yes
EPHE-B2.6-200	2.6	-0.01/-0.02mm	200	6	4	0.5	Yes
EPHE-B2.6-250	2.6	-0.01/-0.02mm	250	6	4	0.5	Yes
EPHE-B2.7-100	2.7	-0.01/-0.02mm	100	6	4	0.5	Yes
EPHE-B2.7-150	2.7	-0.01/-0.02mm	150	6	4	0.5	Yes
EPHE-B2.7-200	2.7	-0.01/-0.02mm	200	6	4	0.5	Yes
EPHE-B2.8-100	2.8	-0.01/-0.02mm	100	6	4	0.5	Yes
EPHE-B2.8-150	2.8	-0.01/-0.02mm	150	6	4	0.5	Yes
EPHE-B2.8-200	2.8	-0.01/-0.02mm	200	6	4	0.5	Yes
EPHE-B2.9-100	2.9	-0.01/-0.02mm	100	6	4	0.5	Yes
EPHE-B2.9-150	2.9	-0.01/-0.02mm	150	6	4	0.5	Yes
EPHE-B2.9-200	2.9	-0.01/-0.02mm	200	6	4	0.5	Yes
EPHE-B3-100	3.0	-0.01/-0.02mm	100	6	4	0.5	Yes

Metric M-2 Straight Ejector Pins - Standard

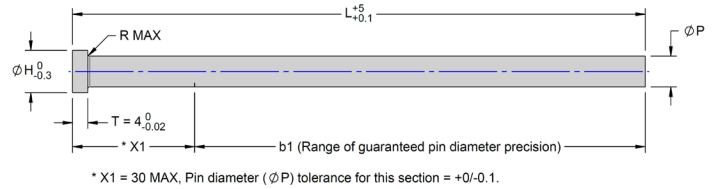


Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B3-150	3.0	-0.01/-0.02mm	150	6	4	0.5	Yes
EPHE-B3-200	3.0	-0.01/-0.02mm	200	6	4	0.5	Yes
EPHE-B3-250	3.0	-0.01/-0.02mm	250	6	4	0.5	Yes
EPHE-B3-300	3.0	-0.01/-0.02mm	300	6	4	0.5	Yes
EPHE-B3-350	3.0	-0.01/-0.02mm	350	6	4	0.5	Yes
EPHE-B3.1-100	3.1	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.1-150	3.1	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.1-200	3.1	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.1-250	3.1	-0.01/-0.02mm	250	7	4	0.5	Yes
EPHE-B3.2-100	3.2	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.2-150	3.2	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.2-200	3.2	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.3-100	3.3	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.3-150	3.3	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.3-200	3.3	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.4-100	3.4	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.4-150	3.4	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.4-200	3.4	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.5-100	3.5	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.5-150	3.5	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.5-200	3.5	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.5-250	3.5	-0.01/-0.02mm	250	7	4	0.5	Yes
EPHE-B3.5-300	3.5	-0.01/-0.02mm	300	7	4	0.5	Yes
EPHE-B3.5-350	3.5	-0.01/-0.02mm	350	7	4	0.5	Yes
EPHE-B3.6-100	3.6	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.6-150	3.6	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.6-200	3.6	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.6-250	3.6	-0.01/-0.02mm	250	7	4	0.5	Yes
EPHE-B3.7-100	3.7	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.7-150	3.7	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.7-200	3.7	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.8-100	3.8	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.8-150	3.8	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.8-200	3.8	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B3.9-100	3.9	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B3.9-150	3.9	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B3.9-200	3.9	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B4-100	4.0	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B4-150	4.0	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B4-200	4.0	-0.01/-0.02mm	200	7	4	0.5	Yes
EPHE-B4-250	4.0	-0.01/-0.02mm	250	7	4	0.5	Yes
EPHE-B4-300	4.0	-0.01/-0.02mm	300	7	4	0.5	Yes
EPHE-B4-350	4.0	-0.01/-0.02mm	350	7	4	0.5	Yes
EPHE-B4.1-100	4.1	-0.01/-0.02mm	100	7	4	0.5	Yes
EPHE-B4.1-150	4.1	-0.01/-0.02mm	150	7	4	0.5	Yes
EPHE-B4.1-200	4.1	-0.01/-0.02mm	200	7	4	0.5	Yes

Metric M-2 Straight Ejector Pins - Standard

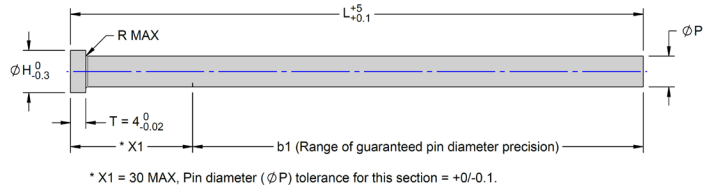


Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B4.1-250	4.1	-0.01/-0.02mm	250	7	4	0.5	Yes
EPHE-B4.2-100	4.2	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.2-150	4.2	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.2-200	4.2	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.3-100	4.3	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.3-150	4.3	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.3-200	4.3	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.4-100	4.4	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.4-150	4.4	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.4-200	4.4	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.5-100	4.5	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.5-150	4.5	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.5-200	4.5	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.5-250	4.5	-0.01/-0.02mm	250	8	4	0.5	Yes
EPHE-B4.5-300	4.5	-0.01/-0.02mm	300	8	4	0.5	Yes
EPHE-B4.5-350	4.5	-0.01/-0.02mm	350	8	4	0.5	Yes
EPHE-B4.6-100	4.6	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.6-150	4.6	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.6-200	4.6	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.6-250	4.6	-0.01/-0.02mm	250	8	4	0.5	Yes
EPHE-B4.7-100	4.7	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.7-150	4.7	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.7-200	4.7	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.8-100	4.8	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.8-150	4.8	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.8-200	4.8	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B4.9-100	4.9	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B4.9-150	4.9	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B4.9-200	4.9	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B5-100	5.0	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B5-150	5.0	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B5-200	5.0	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B5-250	5.0	-0.01/-0.02mm	250	8	4	0.5	Yes
EPHE-B5-300	5.0	-0.01/-0.02mm	300	8	4	0.5	Yes
EPHE-B5-350	5.0	-0.01/-0.02mm	350	8	4	0.5	Yes
EPHE-B5.1-100	5.1	-0.01/-0.02mm	100	8	4	0.5	Yes
EPHE-B5.1-150	5.1	-0.01/-0.02mm	150	8	4	0.5	Yes
EPHE-B5.1-200	5.1	-0.01/-0.02mm	200	8	4	0.5	Yes
EPHE-B5.1-250	5.1	-0.01/-0.02mm	250	8	4	0.5	Yes
EPHE-B5.5-100	5.5	-0.01/-0.02mm	100	9	4	0.5	Yes
EPHE-B5.5-150	5.5	-0.01/-0.02mm	150	9	4	0.5	Yes
EPHE-B5.5-200	5.5	-0.01/-0.02mm	200	9	4	0.5	Yes
EPHE-B5.5-250	5.5	-0.01/-0.02mm	250	9	4	0.5	Yes
EPHE-B5.5-300	5.5	-0.01/-0.02mm	300	9	4	0.5	Yes
EPHE-B5.5-350	5.5	-0.01/-0.02mm	350	9	4	0.5	Yes
EPHE-B5.6-100	5.6	-0.01/-0.02mm	100	9	4	0.5	Yes

Metric M-2 Straight Ejector Pins - Standard

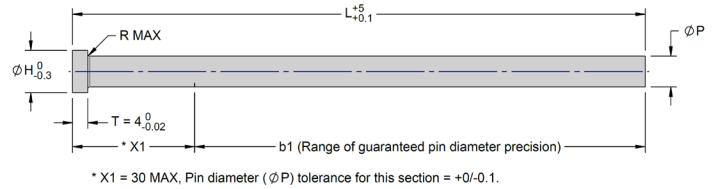


Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B5.6-150	5.6	-0.01/-0.02mm	150	9	4	0.5	Yes
EPHE-B5.6-200	5.6	-0.01/-0.02mm	200	9	4	0.5	Yes
EPHE-B5.6-250	5.6	-0.01/-0.02mm	250	9	4	0.5	Yes
EPHE-B6-100	6.0	-0.01/-0.02mm	100	9	4	0.5	Yes
EPHE-B6-150	6.0	-0.01/-0.02mm	150	9	4	0.5	Yes
EPHE-B6-200	6.0	-0.01/-0.02mm	200	9	4	0.5	Yes
EPHE-B6-250	6.0	-0.01/-0.02mm	250	9	4	0.5	Yes
EPHE-B6-300	6.0	-0.01/-0.02mm	300	9	4	0.5	Yes
EPHE-B6-350	6.0	-0.01/-0.02mm	350	9	4	0.5	Yes
EPHE-B6.1-100	6.1	-0.01/-0.02mm	100	9	4	0.5	Yes
EPHE-B6.1-150	6.1	-0.01/-0.02mm	150	9	4	0.5	Yes
EPHE-B6.1-200	6.1	-0.01/-0.02mm	200	9	4	0.5	Yes
EPHE-B6.1-250	6.1	-0.01/-0.02mm	250	9	4	0.5	Yes
EPHE-B6.5-100	6.5	-0.01/-0.02mm	100	10	4	0.5	Yes
EPHE-B6.5-150	6.5	-0.01/-0.02mm	150	10	4	0.5	Yes
EPHE-B6.5-200	6.5	-0.01/-0.02mm	200	10	4	0.5	Yes
EPHE-B6.5-250	6.5	-0.01/-0.02mm	250	10	4	0.5	Yes
EPHE-B6.5-300	6.5	-0.01/-0.02mm	300	10	4	0.5	Yes
EPHE-B6.5-350	6.5	-0.01/-0.02mm	350	10	4	0.5	Yes
EPHE-B6.6-100	6.6	-0.01/-0.02mm	100	10	4	0.5	Yes
EPHE-B6.6-150	6.6	-0.01/-0.02mm	150	10	4	0.5	Yes
EPHE-B6.6-200	6.6	-0.01/-0.02mm	200	10	4	0.5	Yes
EPHE-B6.6-250	6.6	-0.01/-0.02mm	250	10	4	0.5	Yes
EPHE-B7-100	7.0	-0.01/-0.02mm	100	10	4	0.5	Yes
EPHE-B7-150	7.0	-0.01/-0.02mm	150	10	4	0.5	Yes
EPHE-B7-200	7.0	-0.01/-0.02mm	200	10	4	0.5	Yes
EPHE-B7-250	7.0	-0.01/-0.02mm	250	10	4	0.5	Yes
EPHE-B7-300	7.0	-0.01/-0.02mm	300	10	4	0.5	Yes
EPHE-B7-350	7.0	-0.01/-0.02mm	350	10	4	0.5	Yes
EPHE-B7.1-100	7.1	-0.01/-0.02mm	100	10	4	0.5	Yes
EPHE-B7.1-150	7.1	-0.01/-0.02mm	150	10	4	0.5	Yes
EPHE-B7.1-200	7.1	-0.01/-0.02mm	200	10	4	0.5	Yes
EPHE-B7.1-250	7.1	-0.01/-0.02mm	250	10	4	0.5	Yes
EPHE-B7.5-100	7.5	-0.01/-0.02mm	100	11	4	0.5	Yes
EPHE-B7.5-150	7.5	-0.01/-0.02mm	150	11	4	0.5	Yes
EPHE-B7.5-200	7.5	-0.01/-0.02mm	200	11	4	0.5	Yes
EPHE-B7.5-250	7.5	-0.01/-0.02mm	250	11	4	0.5	Yes
EPHE-B7.6-100	7.6	-0.01/-0.02mm	100	11	4	0.5	Yes
EPHE-B7.6-150	7.6	-0.01/-0.02mm	150	11	4	0.5	Yes
EPHE-B7.6-200	7.6	-0.01/-0.02mm	200	11	4	0.5	Yes
EPHE-B7.6-250	7.6	-0.01/-0.02mm	250	11	4	0.5	Yes
EPHE-B8-100	8.0	-0.01/-0.02mm	100	11	4	0.5	Yes
EPHE-B8-150	8.0	-0.01/-0.02mm	150	11	4	0.5	Yes
EPHE-B8-200	8.0	-0.01/-0.02mm	200	11	4	0.5	Yes
EPHE-B8-250	8.0	-0.01/-0.02mm	250	11	4	0.5	Yes
EPHE-B8-300	8.0	-0.01/-0.02mm	300	11	4	0.5	Yes

Metric M-2 Straight Ejector Pins - Standard

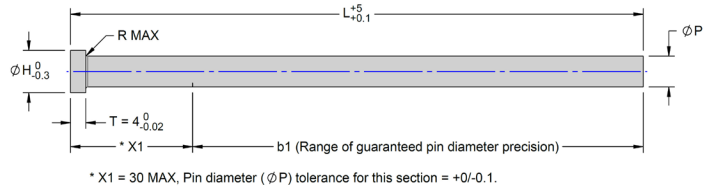

Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B8-350	8.0	-0.01/-0.02mm	350	11	4	0.5	Yes
EPHE-B8.1-100	8.1	-0.01/-0.02mm	100	11	4	0.5	Yes
EPHE-B8.1-150	8.1	-0.01/-0.02mm	150	11	4	0.5	Yes
EPHE-B8.1-200	8.1	-0.01/-0.02mm	200	11	4	0.5	Yes
EPHE-B8.1-250	8.1	-0.01/-0.02mm	250	11	4	0.5	Yes
EPHE-B8.5-100	8.5	-0.01/-0.02mm	100	14	4	0.5	Yes
EPHE-B8.5-150	8.5	-0.01/-0.02mm	150	14	4	0.5	Yes
EPHE-B8.5-200	8.5	-0.01/-0.02mm	200	14	4	0.5	Yes
EPHE-B8.5-250	8.5	-0.01/-0.02mm	250	14	4	0.5	Yes
EPHE-B8.6-100	8.6	-0.01/-0.02mm	100	14	4	0.5	Yes
EPHE-B8.6-150	8.6	-0.01/-0.02mm	150	14	4	0.5	Yes
EPHE-B8.6-200	8.6	-0.01/-0.02mm	200	14	4	0.5	Yes
EPHE-B8.6-250	8.6	-0.01/-0.02mm	250	14	4	0.5	Yes
EPHE-B9-100	9.0	-0.01/-0.02mm	100	14	4	0.5	Yes
EPHE-B9-150	9.0	-0.01/-0.02mm	150	14	4	0.5	Yes
EPHE-B9-200	9.0	-0.01/-0.02mm	200	14	4	0.5	Yes
EPHE-B9-250	9.0	-0.01/-0.02mm	250	14	4	0.5	Yes
EPHE-B9-300	9.0	-0.01/-0.02mm	300	14	4	0.5	Yes
EPHE-B9-350	9.0	-0.01/-0.02mm	350	14	4	0.5	Yes
EPHE-B9.1-100	9.1	-0.01/-0.02mm	100	15	4	0.5	Yes
EPHE-B9.1-150	9.1	-0.01/-0.02mm	150	15	4	0.5	Yes
EPHE-B9.1-200	9.1	-0.01/-0.02mm	200	15	4	0.5	Yes
EPHE-B9.1-250	9.1	-0.01/-0.02mm	250	15	4	0.5	Yes
EPHE-B9.5-100	9.5	-0.01/-0.02mm	100	15	4	0.5	Yes
EPHE-B9.5-150	9.5	-0.01/-0.02mm	150	15	4	0.5	Yes
EPHE-B9.5-200	9.5	-0.01/-0.02mm	200	15	4	0.5	Yes
EPHE-B9.5-250	9.5	-0.01/-0.02mm	250	15	4	0.5	Yes
EPHE-B9.6-100	9.6	-0.01/-0.02mm	100	15	4	0.5	Yes
EPHE-B9.6-150	9.6	-0.01/-0.02mm	150	15	4	0.5	Yes
EPHE-B9.6-200	9.6	-0.01/-0.02mm	200	15	4	0.5	Yes
EPHE-B9.6-250	9.6	-0.01/-0.02mm	250	15	4	0.5	Yes
EPHE-B10-100	10.0	-0.01/-0.02mm	100	15	4	0.5	Yes
EPHE-B10-150	10.0	-0.01/-0.02mm	150	15	4	0.5	Yes
EPHE-B10-200	10.0	-0.01/-0.02mm	200	15	4	0.5	Yes
EPHE-B10-250	10.0	-0.01/-0.02mm	250	15	4	0.5	Yes
EPHE-B10-300	10.0	-0.01/-0.02mm	300	15	4	0.5	Yes
EPHE-B10-350	10.0	-0.01/-0.02mm	350	15	4	0.5	Yes
EPHE-B10.1-100	10.1	-0.01/-0.02mm	100	15	4	0.5	Yes
EPHE-B10.1-150	10.1	-0.01/-0.02mm	150	15	4	0.5	Yes
EPHE-B10.1-200	10.1	-0.01/-0.02mm	200	15	4	0.5	Yes
EPHE-B10.1-250	10.1	-0.01/-0.02mm	250	15	4	0.5	Yes
EPHE-B10.5-100	10.5	-0.01/-0.02mm	100	17	4	0.5	Yes
EPHE-B10.5-150	10.5	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B10.5-200	10.5	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B10.5-250	10.5	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B10.6-100	10.6	-0.01/-0.02mm	100	17	4	0.5	Yes

Metric M-2 Straight Ejector Pins - Standard

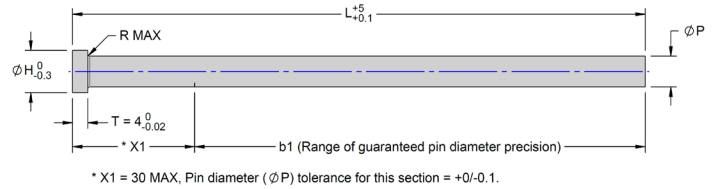

Item Number	P Pin Diameter	P Tolerance	L Length	H Head Diameter	T Head Thickness	R Max	Head Annealed
EPHE-B10.6-150	10.6	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B10.6-200	10.6	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B10.6-250	10.6	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B11-100	11.0	-0.01/-0.02mm	100	17	4	0.5	Yes
EPHE-B11-150	11.0	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B11-200	11.0	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B11-250	11.0	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B11.1-100	11.1	-0.01/-0.02mm	100	17	4	0.5	Yes
EPHE-B11.1-150	11.1	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B11.1-200	11.1	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B11.1-250	11.1	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B11.5-100	11.5	-0.01/-0.02mm	100	17	4	0.5	Yes
EPHE-B11.5-150	11.5	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B11.5-200	11.5	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B11.5-250	11.5	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B11.6-100	11.6	-0.01/-0.02mm	100	17	4	0.5	Yes
EPHE-B11.6-150	11.6	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B11.6-200	11.6	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B11.6-250	11.6	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B12-150	12.0	-0.01/-0.02mm	150	17	4	0.5	Yes
EPHE-B12-200	12.0	-0.01/-0.02mm	200	17	4	0.5	Yes
EPHE-B12-250	12.0	-0.01/-0.02mm	250	17	4	0.5	Yes
EPHE-B12-300	12.0	-0.01/-0.02mm	300	17	4	0.5	Yes
EPHE-B12-350	12.0	-0.01/-0.02mm	350	17	4	0.5	Yes